



- Button function: on/off, zero, mm/inch, ABS, data preset, change measuring direction (time is adjustable)
- CR2032 battery, automatic power off
- Data output
- Stainless steel base
- Pointed tip
- Optional accessory: data output cable (code **7315-50M**, **7302-40M**)



**2142-102**

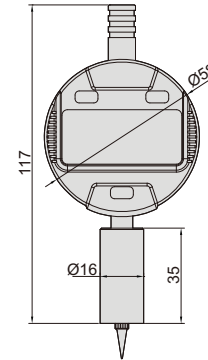


**2142-101/2142-301**

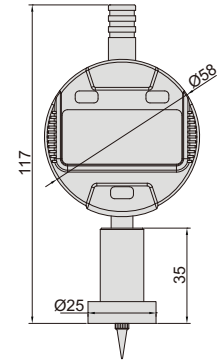

**2142-102/2142-302**

Unit: mm



pointed tip

Code	Range	Digital indicator stroke	Digital indicator resolution	Accuracy	Base
<b>2142-101</b>	0-12.7mm/0-0.5"	12.7mm/0.5"	0.01mm/0.0005"	±20µm	Ø16mm
<b>2142-102</b>	0-12.7mm/0-0.5"	12.7mm/0.5"	0.01mm/0.0005"	±20µm	Ø25mm
<b>2142-301</b>	0-12.7mm/0-0.5"	12.7mm/0.5"	0.001mm/0.00005"	±5µm	Ø16mm
<b>2142-302</b>	0-12.7mm/0-0.5"	12.7mm/0.5"	0.001mm/0.00005"	±5µm	Ø25mm