


# DIGITAL CALIPERS WITH INTERCHANGEABLE POINTS

DATA  
OUTPUT



1526-200

- Non waterproof
- Supplied with 3 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel
- Optional accessory: points




short spherical points (included) Unit: mm



long spherical/flat points (included) Unit: mm



spherical blade points (included) Unit: mm

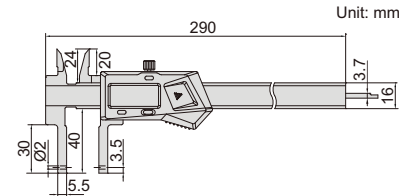

## With data interface

Code	Data output cable (optional)
1526-200	code 7315-21, 7302-21

## Built-in wireless

Code	Receiver (optional)
1526-200WL	code 7315-2/3/6/7/8/9


Point	Range	Accuracy	Application
short spherical points	12-212mm/0.5-8.5" (internal)	±0.03mm	for grooves inside small hole
long spherical/flat points	24-224mm/1-8.8" (internal) 0-187mm/0-7.5" (external)	±0.03mm	spherical points for grooves inside hole flat points for external grooves
spherical blade points	24-224mm/1-8.8" (internal) 0-187mm/0-7.5" (external)	±0.03mm	for narrow grooves inside hole




zero setting block for external measurement (included)



install points



measure internal and external grooves

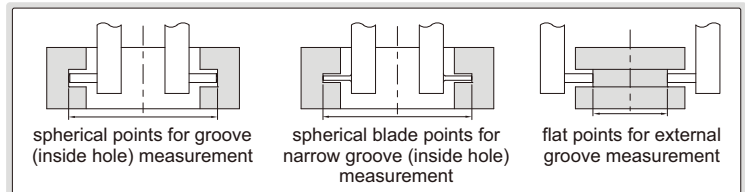

### Depth stop (optional)

**Code**

**6143**

Unit: mm

**6143**


for external groove measurement

for internal groove measurement

### Point sleeve (optional)



**1526-T101**



**Code**

**1526-T101**

### Ball points (optional)



**7391-T5**




\* It is necessary to use point sleeve (code **1526-T101**) for these points

\*\* Range of **1526-200** and **1526-200WL** after installing the points and point sleeve

Code	Ball dia. (D)	Range **
<b>7391-T3 *</b>	SØ2.0mm	75-275mm/3.0-10.8" (internal) 0-146mm/0-5.7" (external)
<b>7391-T4 *</b>	SØ2.5mm	76-276mm/3.0-10.8" (internal) 0-145mm/0-5.7" (external)
<b>7391-T5 *</b>	SØ3.0mm	77-277mm/3.0-10.9" (internal) 0-144mm/0-5.6" (external)
<b>7391-T6 *</b>	SØ3.5mm	78-278mm/3.1-10.9" (internal) 0-143mm/0-5.6" (external)
<b>7391-T7 *</b>	SØ4.0mm	79-279mm/3.1-10.9" (internal) 0-142mm/0-5.6" (external)
<b>7391-T8 *</b>	SØ4.5mm	80-280mm/3.2-11.0" (internal) 0-141mm/0-5.5" (external)
<b>7391-T9 *</b>	SØ5.0mm	81-281mm/3.2-11.0" (internal) 0-140mm/0-5.5" (external)
<b>7391-T10 *</b>	SØ6.0mm	83-283mm/3.3-11.1" (internal) 0-138mm/0-5.4" (external)

### Multifunctional points (optional)

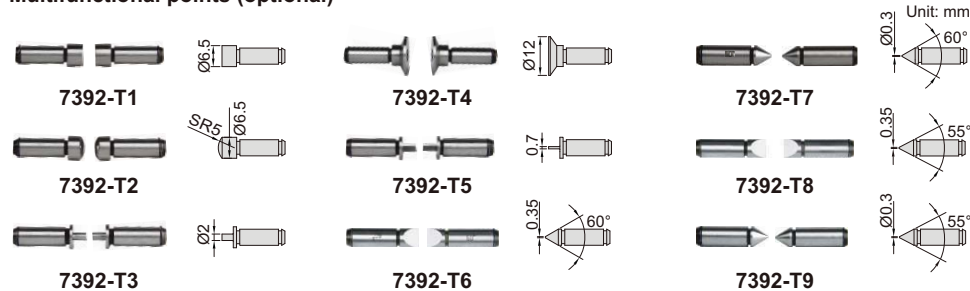

**Range \*\***

66-266mm/2.6-10.5" (internal), 0-155mm/0-6.1" (external)

\*\* Range of **1526-200** and **1526-200WL** after installing the points and point sleeve

Code	Type
<b>7392-T1 *</b>	flat
<b>7392-T2 *</b>	spherical
<b>7392-T3 *</b>	spline
<b>7392-T4 *</b>	disk
<b>7392-T5 *</b>	blade
<b>7392-T6 *</b>	knife-edge
<b>7392-T7 *</b>	point
<b>7392-T8 *</b>	knife-edge
<b>7392-T9 *</b>	point

\* It is necessary to use point sleeve (code **1526-T101**) for these points

### Screw thread points (optional)



#### Internal thread (60° thread angle)

Code	Pitch
<b>7321-T11 *</b>	0.4-0.5mm/64-48TPI
<b>7321-T12 *</b>	0.6-0.9mm/44-28TPI
<b>7321-T13 *</b>	1-1.75mm/24-14TPI
<b>7321-T14 *</b>	2-3mm/13-9TPI
<b>7321-T15 *</b>	3.5-5mm/8-5TPI
<b>7321-T16 *</b>	5.5-7mm/4.5-3.5TPI
<b>7321-T1S *</b>	6 pairs/set, including all above points

#### External thread (60° thread angle)

Code	Pitch
<b>7381-T11 *</b>	0.4-0.5mm/64-48TPI
<b>7381-T12 *</b>	0.6-0.9mm/44-28TPI
<b>7381-T13 *</b>	1-1.75mm/24-14TPI
<b>7381-T14 *</b>	2-3mm/13-9TPI
<b>7381-T15 *</b>	3.5-5mm/8-5TPI
<b>7381-T16 *</b>	5.5-7mm/4.5-3.5TPI
<b>7381-TS *</b>	6 pairs/set, including all above points

**Range \*\***

66-266mm/2.6-10.5" (internal)  
0-155mm/0-6.1" (external)

\*\* Range of **1526-200** and **1526-200WL** after installing the points and point sleeve

\* It is necessary to use point sleeve (code **1526-T101**) for these points