

# DIGITAL INDICATORS FOR BORE GAUGES (WITH TRANSMISSION BUTTON AND SIGNAL LIGHT)

DATA  
OUTPUT


THE ORIGINAL DATA  
REMAINS AFTER POWER OFF

- Specially designed for bore gauges
- The minimum value tracking function can find the diameter automatically
- Read the diameter directly, after inputting the size of setting ring
- Reading in digital and analog
- Display can be rotated by 320°
- Button function: on/off, minimum value tracking, calibration, data preset, inch/metric conversion
- Data remains after power off, no need to recalibrate after power on
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output cable(code **7315-51B**, **7302-40M**), backs (page 164~165), contact points (page 161~163), spindle lift knob (code **7332**)



2108-10F


press the button to transmit data  
data transmission signal light

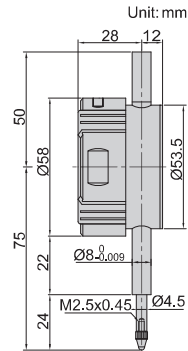

**INSPECTION  
CERTIFICATE**  
TRACEABLE TO NIST




analog pointer



Code	Range	Resolution	Accuracy	Hysteresis	Remark
<b>2108-10F*</b>	12.7mm/0.5"	0.002mm/0.0001" (can switch to: 0.01mm/0.0005")	20µm	10µm	flat back
<b>2108-101F*</b>	12.7mm/0.5"	0.001mm/0.00005"	5µm	2µm	flat back

\*Supplied with manufacturer inspection certificate traceable to NIST USA

Read the diameter directly, after inputting the size of setting ring.



The minimum value tracking function can find the diameter automatically.

