


ADJUSTABLE COEFFICIENT DIGITAL INDICATORS

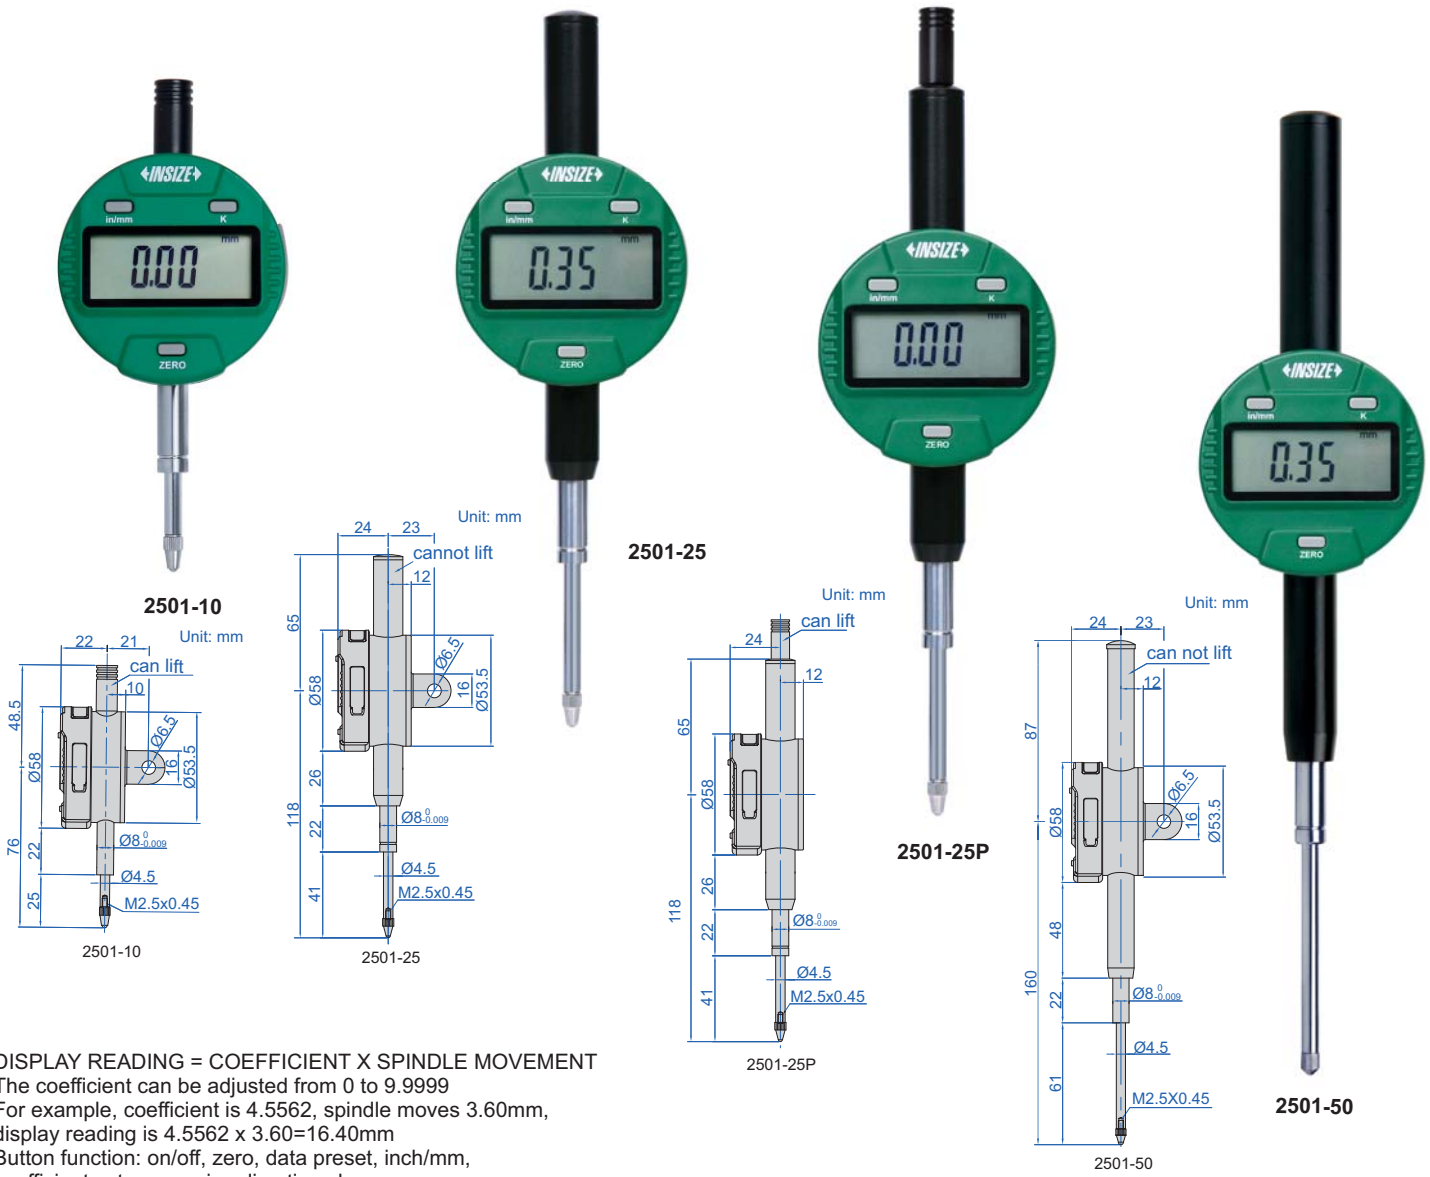

- DISPLAY READING = COEFFICIENT X SPINDLE MOVEMENT
The coefficient can be adjusted from 0 to 9.9999
For example, coefficient is 4.5562, spindle moves 3.60mm, display reading is 4.5562 x 3.60=16.40mm
- Button function: on/off, zero, data preset, inch/mm, coefficient set, measuring direction change
- Switchable high/low frequency measurement mode, high frequency mode is suitable for high speed moving of spindle and has large power consumption, low power consumption in low frequency mode
- Keep preset data in memory after restart
- CR2032 battery, automatic power off (time is adjustable)
- Data output
- Optional accessory: data output cable (code 7315-50M, 7302-40M, 7305-40M) ,backs, contact points

Resolution 0.01mm/0.0005"

Code	Range	Accuracy	Hysteresis	Maximum measuring force	Remark
2501-10 *	12.7mm/0.5"	20µm	10µm	1.5N	flat back
2501-25 *	25.4mm/1"	20µm	10µm	2.2N	flat back
2501-50 *	50.8mm/2"	30µm	10µm	2.5N	flat back
2501-10F *	12.7mm/0.5"	20µm	10µm	1.5N	lug back
2501-25F *	25.4mm/1"	20µm	10µm	2.2N	lug back
2501-50F *	50.8mm/2"	30µm	10µm	2.5N	lug back
2501-25P *	25.4mm/1"	20µm	10µm	2.2N	flat back, with lift cap
2112-50P *	50.8mm/2"	30µm	10µm	2.5N	flat back, with lift cap

* Supplied with manufacturer inspection certificate

