


IP65
WATERPROOF


DATA
OUTPUT

**INSPECTION
CERTIFICATE**

WIRELESS DIGITAL TWO POINTS/THREE POINTS INTERNAL MICROMETERS (ZIGBEE)

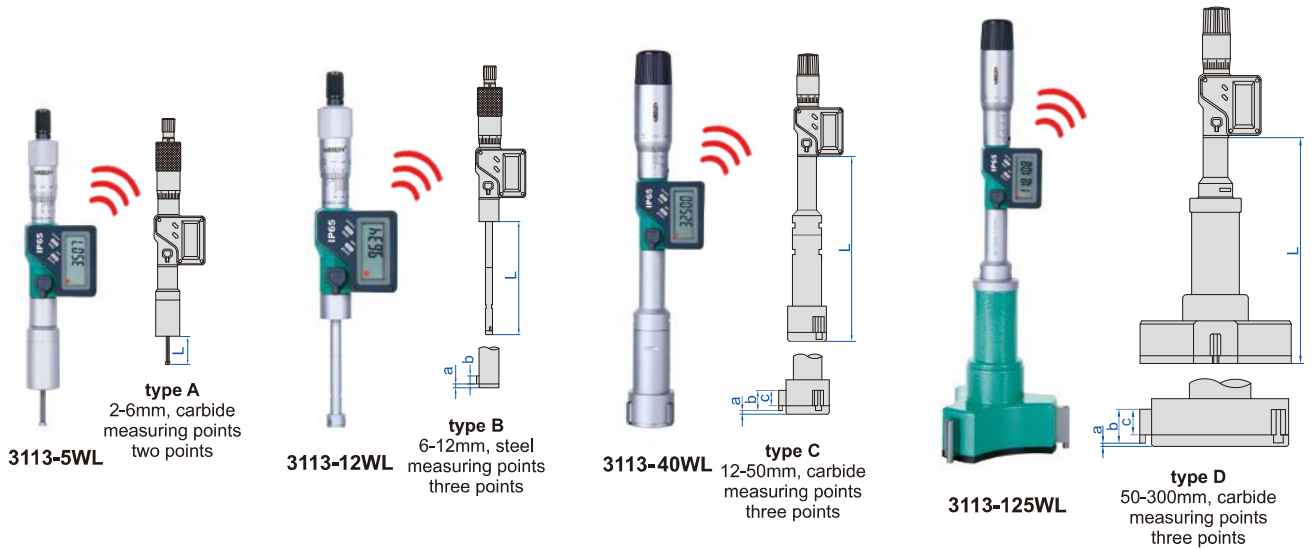

- Resolution 0.001mm/0.00005" (resolution of **3113-275WL** and **3113-300WL** is 0.001mm/0.0001")
- IP65 dust/waterproof
- Built-in wireless data transmission module, Zigbee signal
- Transmission distance is 10 meter (under the condition of no obstruction and no electromagnetic interference)
- Buttons: on/off, set, mm/inch, data transmit
- Data output
- Automatic power off
- Ratchet stop
- Built-in rechargeable lithium battery
- Optional accessory: receiver (code **7315-2/3/6/7/8/9**), setting ring (code **6312**), micrometer stand and clamp (code **6301** and **6301-2**)

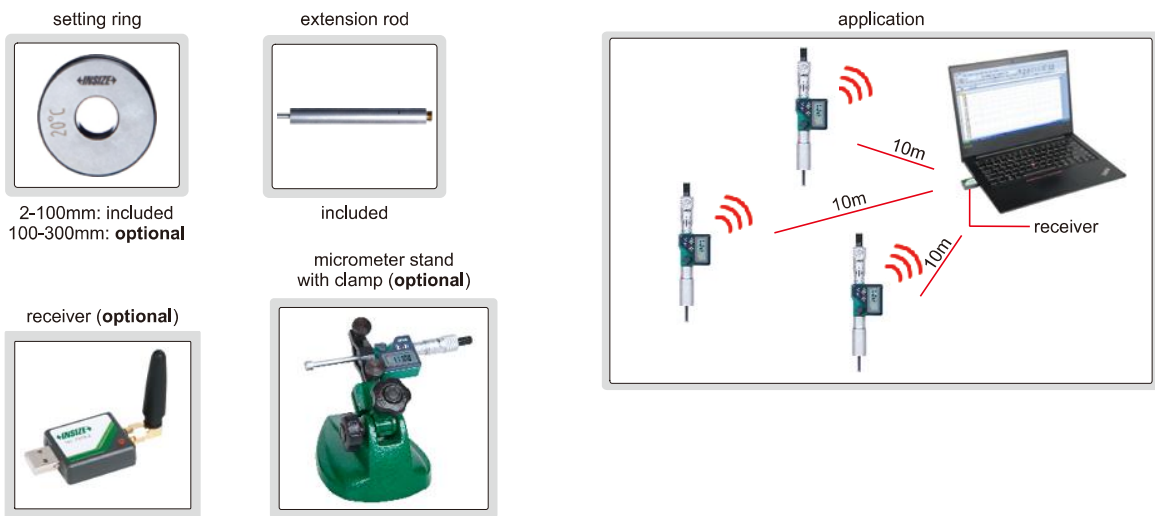

Individual

(mm)

Code	Range	Type	Accuracy	Setting ring	Extension rod (included)	L	a	b	c
3113-2WL *	2-2.5mm/0.08-0.10"	A (two points)	6µm	Ø2.5 (included)	—	12	—	—	—
3113-3WL *	2.5-3mm/0.10-0.12"	A (two points)	6µm	Ø2.5 (included)	—	12	—	—	—
3113-4WL *	3-4mm/0.12-0.16"	A (two points)	6µm	Ø4 (included)	—	22	—	—	—
3113-5WL *	4-5mm/0.16-0.20"	A (two points)	6µm	Ø5 (included)	—	22	—	—	—
3113-6WL *	5-6mm/0.20-0.24"	A (two points)	6µm	Ø6 (included)	—	22	—	—	—
3113-8WL *	6-8mm/0.24-0.31"	B (three points)	4µm	Ø6 (included)	100	57	1.5	2.5	—
3113-10WL *	8-10mm/0.31-0.39"	B (three points)	4µm	Ø8 (included)	100	57	1.5	2.5	—
3113-12WL *	10-12mm/0.39-0.47"	B (three points)	4µm	Ø10 (included)	100	57	1.5	2.5	—
3113-16WL *	12-16mm/0.47-0.63"	C (three points)	4µm	Ø16 (included)	150	99	0.5	6	4.5
3113-20WL *	16-20mm/0.63-0.79"	C (three points)	4µm	Ø16 (included)	150	99	0.5	6	4.5
3113-25WL *	20-25mm/0.79-0.98"	C (three points)	4µm	Ø25 (included)	150	105	0.5	8	6
3113-30WL *	25-30mm/0.98-1.18"	C (three points)	4µm	Ø25 (included)	150	105	0.5	8	6
3113-40WL *	30-40mm/1.18-1.57"	C (three points)	4µm	Ø40 (included)	150	110	0.5	14	12
3113-50WL *	40-50mm/1.57-1.97"	C (three points)	5µm	Ø40 (included)	150	110	0.5	14	12
3113-63WL *	50-63mm/1.97-2.48"	D (three points)	5µm	Ø62 (included)	150	127	0.5	17.5	14.5
3113-75WL *	62-75mm/2.44-2.95"	D (three points)	5µm	Ø62 (included)	150	127	0.5	17.5	14.5
3113-88WL *	75-88mm/2.95-3.46"	D (three points)	5µm	Ø87 (included)	150	127	0.5	17.5	14.5
3113-100WL *	87-100mm/3.43-3.94"	D (three points)	5µm	Ø87 (included)	150	127	0.5	17.5	14.5
3113-125WL *	100-125mm/3.94-4.92"	D (three points)	6µm	optional	150	175	0.9	29	25
3113-150WL *	125-150mm/4.92-5.91"	D (three points)	6µm	optional	150	175	0.9	29	25
3113-175WL *	150-175mm/5.91-6.89"	D (three points)	7µm	optional	150	175	0.9	29	25
3113-200WL *	175-200mm/6.89-7.87"	D (three points)	7µm	optional	150	175	0.9	29	25
3113-225WL	200-225mm/7.87-8.86"	D (three points)	8µm	optional	150	175	0.9	29	25
3113-250WL	225-250mm/8.86-9.84"	D (three points)	8µm	optional	150	175	0.9	29	25
3113-275WL	250-275mm/9.84-10.83"	D (three points)	9µm	optional	150	175	0.9	29	25
3113-300WL	275-300mm/10.83-11.81"	D (three points)	9µm	optional	150	175	0.9	29	25

Set

Code	Range	Micrometers included	Setting ring (included)	Extension rod (included)
3113-232WL*	2-3mm/0.08-0.12"	2-2.5mm, 2.5-3mm	Ø2.5mm	—
3113-363WL*	3-6mm/0.12-0.24"	3-4mm, 4-5mm, 5-6mm	Ø4mm, Ø5mm, Ø6mm	—
3113-123WL*	6-12mm/0.24-0.47"	6-8mm, 8-10mm, 10-12mm	Ø6mm, Ø8mm, Ø10mm	100mm
3113-202WL*	12-20mm/0.47-0.79"	12-16mm, 16-20mm	Ø16mm	150mm
3113-504WL*	20-50mm/0.79-1.97"	20-25mm, 25-30mm, 30-40mm, 40-50mm	Ø25mm, Ø40mm	150mm
3113-1004WL*	50-100mm/1.97-3.94"	50-63mm, 62-75mm, 75-88mm, 87-100mm	Ø62mm, Ø87mm	150mm

*Supplied with manufacturer inspection certificate