




# CARBIDE PLAIN PLUG GAGES

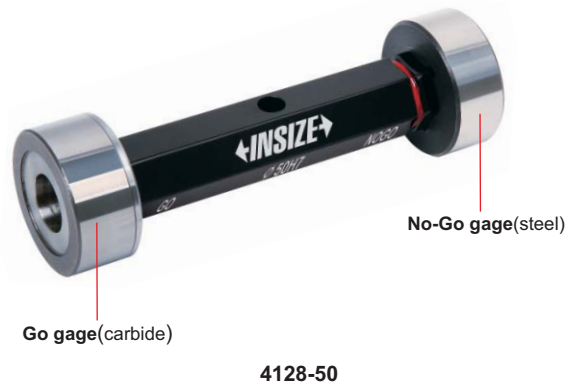

**CUSTOM-MADE**  
 OTHER CLASSES ARE AVAILABLE, SUCH AS H8, H9, G7  
 OTHER DIAMETERS ARE AVAILABLE, SUCH AS 19.003mm  
 OTHER LENGTHS ARE AVAILABLE, SUCH AS 70mm

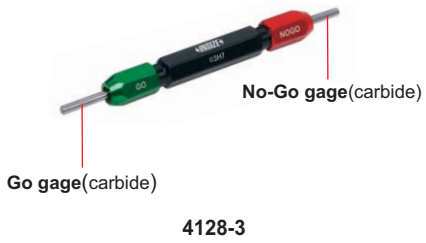

- Supplied with Go and No-Go gages together
- Standard DIN7150-2

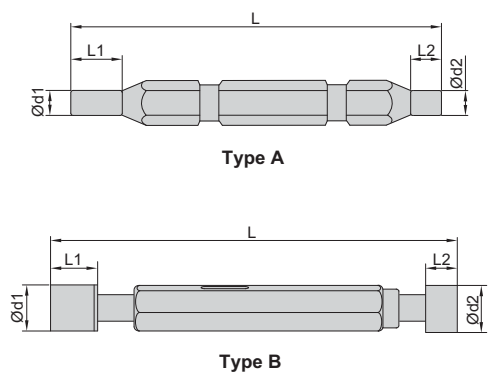

**Size tolerance of H7 (mm)**

Diameter	Size tolerance of Go gage Ød1(µm)	Size tolerance of No-Go gage Ød2(µm)	L1	L2	L
≥1, ≤1.9	+0.5 / +2.5	+9 / +11	15	12	67
>1.9, ≤3	+0.5 / +2.5	+9 / +11	15	12	79
>3, ≤4.7	+0.75 / +3.25	+10.75 / +13.25	15	12	79
>4.7, ≤6	+0.75 / +3.25	+10.75 / +13.25	15	12	88.5
>6, ≤7.1	+0.75 / +3.25	+13.75 / +16.25	15	12	88.5
>7.1, ≤8	+0.75 / +3.25	+13.75 / +16.25	15	12	99
>8, ≤10	+0.75 / +3.25	+13.75 / +16.25	12	7	75
>10, ≤14	+1 / +4	+16.5 / +19.5	12	7	82
>14, ≤18	+1 / +4	+16.5 / +19.5	17	10	97
>18, ≤24	+1 / +5	+19 / +23	17	12	109
>24, ≤30	+1 / +5	+19 / +23	17	14	111
>30, ≤40	+1.5 / +5.5	+23 / +27	20	15	115
>40, ≤50	+1.5 / +5.5	+23 / +27	20	15	160
>50, ≤60	+1.5 / +6.5	+27.5 / +32.5	20	15	160

## H7

Code	Diameter (mm)	Type
4128-1*	1	A
4128-2*	2	A
4128-3*	3	A
4128-4*	4	A
4128-5*	5	A
4128-6*	6	A
4128-7*	7	A
4128-8*	8	A
4128-9*	9	B
4128-10*	10	B
4128-11*	11	B
4128-12*	12	B
4128-13*	13	B

Code	Diameter (mm)	Type
4128-14*	14	B
4128-15*	15	B
4128-16*	16	B
4128-17*	17	B
4128-18*	18	B
4128-19*	19	B
4128-20*	20	B
4128-21*	21	B
4128-22*	22	B
4128-23*	23	B
4128-24*	24	B
4128-25*	25	B
4128-26*	26	B

Code	Diameter (mm)	Type
4128-27*	27	B
4128-28*	28	B
4128-29*	29	B
4128-30*	30	B
4128-31*	31	B
4128-32*	32	B
4128-33*	33	B
4128-34*	34	B
4128-35*	35	B
4128-36*	36	B
4128-37*	37	B
4128-38*	38	B
4128-39*	39	B

Code	Diameter (mm)	Type
4128-40*	40	B
4128-41*	41	B
4128-42*	42	B
4128-43*	43	B
4128-44*	44	B
4128-45*	45	B
4128-46*	46	B
4128-47*	47	B
4128-48*	48	B
4128-49*	49	B
4128-50*	50	B
4128-52*	52	B
4128-55*	55	B
4128-60*	60	B

\*Supplied with manufacturer inspection certificate