

60° GLOSS METER (BASIC TYPE) CODE 5702-DG6



- To test the gloss of coating, such as painting, varnish, printing ink, etc.
- To test the material surfaces, such as metal, granite, ceramic, plastic, paper, etc.
- According to ISO 2813, ISO 7668, ASTM D523, ASTM D2457, DIN 67530
- Automatic judgement after setting high and low limits
- Automatic power off




base with calibration block (included)




SPECIFICATION

Incidence angle	60°
Measuring range	0~200GU
Resolution	0.1GU
Accuracy	±1.5GU (range<120GU) ±1.5% (range≥120GU)
Repeatability	0.2GU (range<120GU) 0.2% (range≥120GU)
Zero error	0.1GU
Measuring area	20×10mm
Power supply	rechargeable battery
Data port	USB
Dimension	135×45×75mm
Weight	237g

software (included), test can be controlled from the software,
display test data and report



report

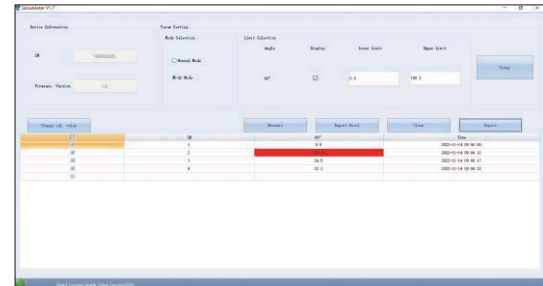

software

DATE	TIME	UNIT	MODE
2023-10-27	10:00	GU	60°
2023-10-27	10:05	GU	60°
2023-10-27	10:10	GU	60°
2023-10-27	10:15	GU	60°
2023-10-27	10:20	GU	60°
2023-10-27	10:25	GU	60°
2023-10-27	10:30	GU	60°
2023-10-27	10:35	GU	60°
2023-10-27	10:40	GU	60°
2023-10-27	10:45	GU	60°
2023-10-27	10:50	GU	60°
2023-10-27	10:55	GU	60°
2023-10-27	11:00	GU	60°
2023-10-27	11:05	GU	60°
2023-10-27	11:10	GU	60°
2023-10-27	11:15	GU	60°
2023-10-27	11:20	GU	60°
2023-10-27	11:25	GU	60°
2023-10-27	11:30	GU	60°
2023-10-27	11:35	GU	60°
2023-10-27	11:40	GU	60°
2023-10-27	11:45	GU	60°
2023-10-27	11:50	GU	60°
2023-10-27	11:55	GU	60°
2023-10-27	12:00	GU	60°

measurement data is sent to Excel

STANDARD DELIVERY

Main unit	1 pc
Base with calibration block	1 pc
U disk	1 pc
AC/DC adapter	1 pc
USB data cable	1 pc
Cleaning cloth	1 pc