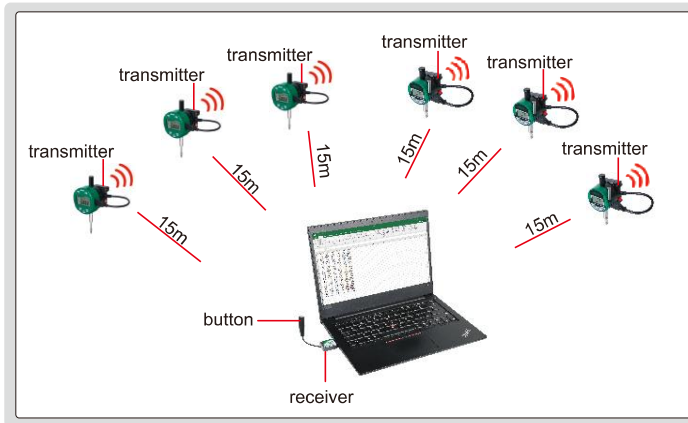




# WIRELESS DATA TRANSMISSION SYSTEM OF DIGITAL INDICATORS (REMOTE CONTROL)

- The readings of digital indicators can be transmitted to computers or mobile phones
- Wireless zigbee protocol, conforming to IEEE802, 2.4GHz band
- Transmission distance is 15 meter(under the condition of no obstruction and no electromagnetic interference)





## Transmitter



- Suitable for digital indicators
- CR2032 battery

Code	Transmitter	Connecting with digital indicators
7213-56		

## Receiver(keyboard signal)

- For computers and mobile phones
- Recognized as HID keyboard device, the transmitted data is recognized by computers or mobile phones as keyboard input data and press enter key, such as 12.34↵. No need to install drivers and softwares
- Data can be transmitted to excel, word, txt etc.
- Suitable for any softwares which can receive keyboard signal

Code	Product	Description	Remark	Transmit data
7213-6M		multichannel receiver	Connected with 6 transmitter, each channel has status indicator	<ul style="list-style-type: none"> <li>■ Press the button of the receiver</li> <li>■ Data is transmitted once, the signal light of the receiver flashes once</li> </ul>
7213-7M				

Code	Product	Description	Remark	Transmit data
7213-8M	 <p>button</p> <p>Micro USB port</p>	multichannel receiver	Connected with 6 transmitter, each channel has status indicator	<ul style="list-style-type: none"> <li>Press the button of the receiver</li> <li>Data is transmitted once, the signal light of the receiver flashes once</li> </ul>
7213-9M	 <p>button</p> <p>Lightning port</p>			

- Transmission method: the button on receiver is pressed once, the readings of all digital indicators are transmitted

	channel 1	channel 2	channel 3	channel 4	channel 5	channel 6
	A	B	C	D	E	F
1	24.35	0.4045	57.72	1.949	0.4075	0.03568
2	24.45	0.5045	57.82	2.049	0.5075	0.13568
3	26.35	0.4045	57.72	1.949	0.4075	0.00078
4	27.35	0.4045	57.72	1.7575	0.4075	0.0762
5	28.35	0.4045	57.72	1.7575	0.4075	0.0762
6	29.35	0.4045	57.72	1.7575	0.4075	0.07618
7	30.35	0.4045	57.72	1.7575	0.4075	0.55334
8	31.35	0.4045	57.72	1.7575	0.4075	0.61198
9	24.35	0.4045	57.72	1.7575	0.4075	0.6172

hand switch, code **7213-SW**(included), length 2m

