
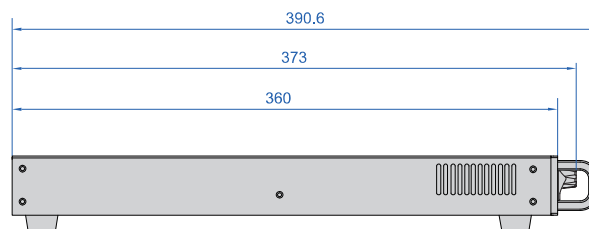


HIGH POWER DC POWER SUPPLIES

- High precision and low ripple
- OVP/OCV/OPP/OTP protection
- 1U half rack, suitable for system integration
- Remote compensation function
- Various communication interfaces

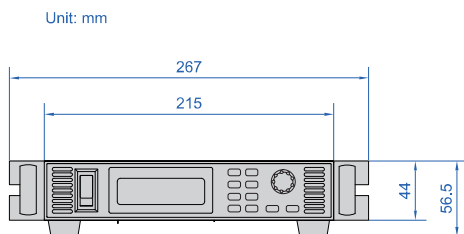

SPECIFICATION

Code	9915-NCK61	9915-NCK62	9915-NCK63	9915-NCK91	9915-NCK92	9915-NC1K1	
Rate output voltage	0~30V	0~60V	0~100V	0~30V	0~60V	0~100V	
Rate output current	0~20A	0~10A	0~6A	0~30A	0~15A	0~10A	
Maximum output power	600W			900W		1000W	
Voltage	Setting resolution	1mV		10mV	1mV	10mV	
	Setting accuracy	≤0.05%+0.2%FS	≤0.05%+0.1%FS		≤0.05%+0.2%FS	≤0.05%+0.1%FS	
	Readback resolution	1mV		10mV	1mV	10mV	
	Readback accuracy	≤0.05%+0.2%FS	≤0.05%+0.1%FS		≤0.05%+0.2%FS	≤0.05%+0.1%FS	
	Load regulation	≤0.05%+20mV	≤0.1%+20mV	≤0.1%+30mV	≤0.05%+20mV	≤0.1%+20mV	≤0.1%+30mV
	Line regulation	≤0.05%+20mV	≤0.1%+20mV	≤0.1%+30mV	≤0.05%+20mV	≤0.1%+20mV	≤0.1%+30mV
Ripple	≤30mVrms	≤60mVrms	≤80mVrms	≤30mVrms	≤60mVrms	≤80mVrms	
Current	Setting resolution	1mA					
	Setting accuracy	≤0.1%+0.1%FS	≤0.1%+0.5%FS		≤0.1%+0.1%FS	≤0.1%+0.5%FS	
	Readback resolution	1mA					
	Readback accuracy	≤0.1%+0.2%FS	≤0.1%+0.5%FS		≤0.1%+0.2%FS	≤0.1%+0.5%FS	
	Load regulation	≤0.05%+20mA	≤0.1%+20mA	≤0.1%+30mA	≤0.05%+20mA	≤0.1%+20mA	≤0.1%+30mA
	Line regulation	≤0.05%+20mA	≤0.1%+20mA	≤0.1%+30mA	≤0.05%+20mA	≤0.1%+20mA	≤0.1%+30mA
Ripple	≤30mArms	≤60mArms	≤80mArms	≤30mArms	≤60mArms	≤80mArms	
Work condition	temperature: 0°C~40°C, humidity: 20%RH~80%RH						
Storage condition	temperature: -10°C~55°C, humidity: 10%RH~90%RH						
Cool system	fan cool						
Power supply	220V±10%, 50Hz/60Hz						
Dimension (W×D×H)	215x360x44mm						
Weight	4kg						