


TORQUE WRENCHES

ATTENTION: CLOCKWISE
OPERATION ONLY

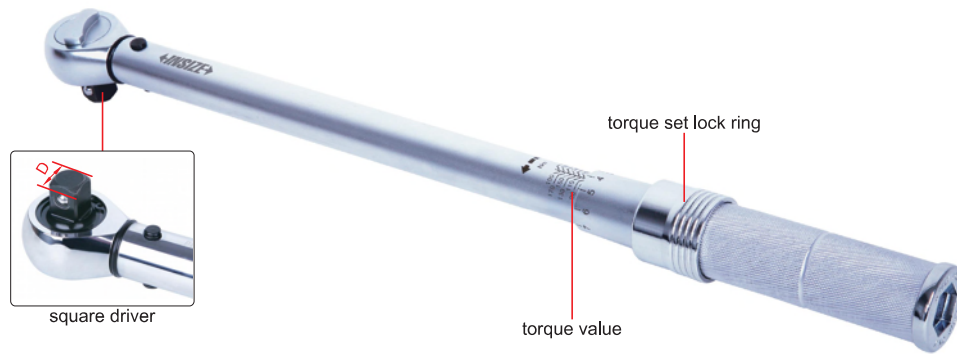

IST-9WM200

- Ratchet head
- According to DIN ISO 6789, ASME B107.300
- All-metal construction, sturdy and durable

SPECIFICATION

| Code | IST-9WM12 | IST-9WM20 | IST-9WM30 | IST-9WM60 | IST-9WM100 |
|-------------------|-----------|-----------|-----------|-----------|------------|
| Range (clockwise) | 2.5~12N.m | 4~20N.m | 6~30N.m | 10~60N.m | 20~100N.m |
| Accuracy | ±3% | ±3% | ±3% | ±3% | ±3% |
| Graduation | 0.1N.m | 0.1N.m | 0.2N.m | 0.5N.m | 0.5N.m |
| Square driver (D) | 1/4" | 1/4" | 3/8" | 3/8" | 1/2" |
| Length | 290mm | 290mm | 318mm | 388mm | 443mm |
| Weight | 680g | 680g | 820g | 960g | 1040g |

| Code | IST-9WM125 | IST-9WM200 | IST-9WM335 | IST-9WM500 | IST-9WM800 |
|-------------------|------------|------------|------------|------------|--------------------------------|
| Range (clockwise) | 25~125N.m | 40~200N.m | 65~335N.m | 100~500N.m | 160~800N.m |
| Accuracy | ±3% | ±3% | ±3% | ±3% | ±3% (≤500N.m) ±4% (>500N.m) |
| Graduation | 0.5N.m | 1N.m | 1N.m | 2.5N.m | 4N.m |
| Square driver (D) | 1/2" | 1/2" | 1/2" | 3/4" | 3/4" |
| Length | 443mm | 468mm | 528mm | 855mm | 1055mm |
| Weight | 1040g | 1160g | 1300g | 5000g | 5900g |

| Code | IST-9WM1000 | IST-9WM1500 | IST-9WM2000 | IST-9WM3000 |
|-------------------|--------------------------------|--------------------------------|--------------------------------|-------------|
| Range (clockwise) | 200~1000N.m | 300~1500N.m | 400~2000N.m | 600~3000N.m |
| Accuracy | ±3% (≤500N.m) ±4% (>500N.m) | ±3% (≤500N.m) ±4% (>500N.m) | ±3% (≤500N.m) ±4% (>500N.m) | ±4% |
| Graduation | 5N.m | 5N.m | 10N.m | 15N.m |
| Square driver (D) | 3/4" | 1" | 1" | 1" |
| Length | 1055mm | 1260mm | 1260mm | 1260mm |
| Weight | 5900g | 9200g | 9200g | 10500g |