


- Clockwise and counter-clockwise operation
- Unit: N.m, in.lb, ft.lb, kg.cm
- Peak and track working modes
- Target torque value can be set, with audible and visible alarm:
 - Green LED light on and buzzer sounds when target torque value is 90%~100% of target torque
 - Red LED light on and buzzer sounds when target torque value is reached
- Power off automatically in 5 minutes without any operations
- Non-slip grip handle
- With overload record (once the torque reaches 110% of the maximum range)

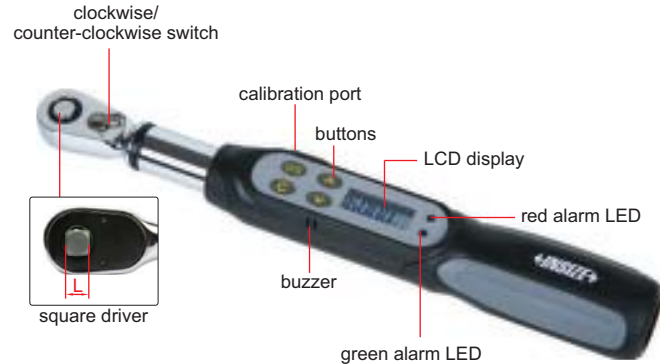

IST-WP6

SPECIFICATION

Code		IST-WP6	IST-WP12	IST-WP20
Range		1.2~6N.m	2.4~12N.m	4~20N.m
Accuracy	clockwise	±3%	±3%	±3%
	counter-clockwise	±4%	±4%	±4%
Resolution		0.001N.m	0.01N.m	0.01N.m
Square driver (L)		1/4"	1/4"	1/4"
Power supply		1×AAA battery		
Length		260mm	260mm	260mm
Weight		430g	430g	430g

OPTIONAL ACCESSORY

Calibration cable

IST-SD-CABLE