


FRONT AND SIDE VIEW VIDEOSCOPE

REAR FIBER ILLUMINATION

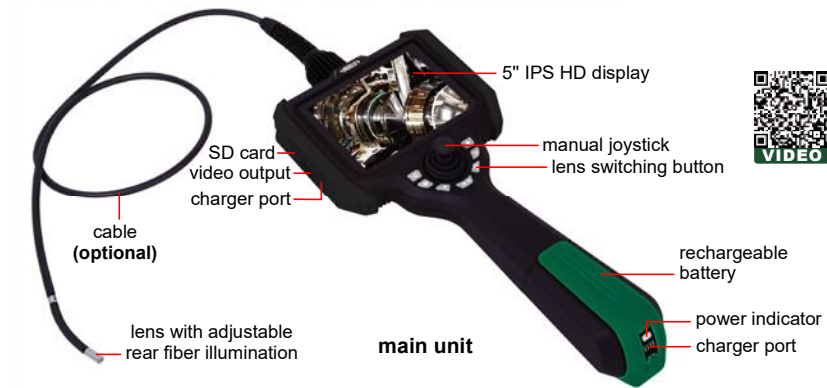

MAIN UNIT (WITHOUT CABLE)

| | |
|---------------|--|
| Code | ISV-S |
| Display | 5" high definition LCD |
| Resolution | 1024×720 |
| Function | take pictures, take videos |
| File format | picture: JPG, video: MP4 |
| Image process | image zoom (1X, 2X, 3X, 4X) |
| Image control | freeze, flip over, playback and analog ruler |
| Memory | memory card |
| Output | WIFI (only for Android OS), USB, HDMI |
| Power supply | rechargeable lithium battery (working time ≥ 4hours) AC/DC adapter (for continuous working) |
| Weight | 1000g |



changeable lens cable



tripod (included)



ISV-K-CLAMP (optional)



WIFI real-time image transmission



ISV-S-HOOK (optional)



ISV-S-MAGNET (optional)

STANDARD DELIEVERY


| | |
|---------------|------|
| Main unit | 1 pc |
| 32G SD card | 1 pc |
| Card reader | 1 pc |
| USB cable | 1 pc |
| Tripod | 1 pc |
| AC/DC adapter | 1 pc |

OPTIONAL ACCESSORY

| | |
|-------------------|--|
| Cable | please refer to details |
| Temperature alarm | ISV-S-HTALARM (must be installed in factory, for Ø3.9mm, Ø6.0mm) |
| Hook | ISV-S-HOOK (must be installed in factory, for Ø3.9mm, Ø6.0mm) |
| Magnet | ISV-S-MAGNET (must be installed in factory, for Ø3.9mm, Ø6.0mm) |
| Clamp | ISV-K-CLAMP |

OPERATION ENVIRONMENT

| | |
|-----------------------|------------------------------|
| Main unit | -10~50°C, no preheat |
| Operation temperature | -20~70°C |
| Storage temperature | -20~60°C |
| Relative humidity | maximum 90%, no condensation |

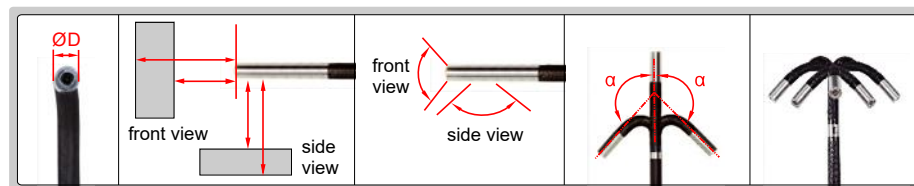

diameter (ØD) depth of field (DOF) angle of view (θ) bend range (α) bend in 4 directions

FOUR-DIRECTION BENDING CABLE, FRONT VIEW&SIDE VIEW

| Code | Cable | | Lens | | | | | | | | | |
|-----------|--------|----------------------------|--------------------------|-----------------|---------------|---|----------------|-------------------|--------------|-------|------------|------------------|
| | length | type | view direction | bend direction | diameter (ØD) | depth of field (DOF) | bend range (α) | angle of view (θ) | illumination | pixel | resolution | dust/ waterproof |
| ISV-S2810 | 1m | tungsten wire weaved cable | front view and side view | four directions | 2.8mm | front view: 3~70mm side view: 3~70mm | ±160° | >120° | front LED | 0.16M | 400×400 | IP65 |
| ISV-S2815 | 1.5m | | | | | | | | | | | |
| ISV-S2820 | 2m | | | | | | | | | | | |
| ISV-S2830 | 3m | | | | | | | | | | | |

| Code | Cable | | Lens | | | | | | | | | |
|-----------|--------|----------------------------|--------------------------|-----------------|---------------|--|----------------|-------------------|--------------|-------|------------|------------------|
| | length | type | view direction | bend direction | diameter (ØD) | depth of field (DOF) | bend range (α) | angle of view (θ) | illumination | pixel | resolution | dust/ waterproof |
| ISV-S3910 | 1m | tungsten wire weaved cable | front view and side view | four directions | 3.9mm | front view: 7~150mm side view: 5~80mm | ±160° | >120° | rear fiber | 0.92M | 1280×720 | IP67 |
| ISV-S3915 | 1.5m | | | | | | | | | | | |
| ISV-S3920 | 2m | | | | | | | | | | | |
| ISV-S3930 | 3m | | | | | | | | | | | |
| ISV-S3940 | 4m | | | | | | | | | | | |
| ISV-S3950 | 5m | | | | | | | | | | | |
| ISV-S6010 | 1m | tungsten wire weaved cable | front view and side view | four directions | 6.0mm | front view: 12~200mm (optional 3~70mm) side view: 8~150mm (optional 3~70mm) | ±160° | >120° | rear fiber | 0.92M | 1280×720 | IP67 |
| ISV-S6015 | 1.5m | | | | | | | | | | | |
| ISV-S6020 | 2m | | | | | | | | | | | |
| ISV-S6030 | 3m | | | | | | | | | | | |
| ISV-S6040 | 4m | | | | | | | | | | | |
| ISV-S6050 | 5m | | | | | | | | | | | |