


SHOCK
PROOF

DIAL CALIPER



1312-150A

- Shockproof dial indicator
- Made of stainless steel

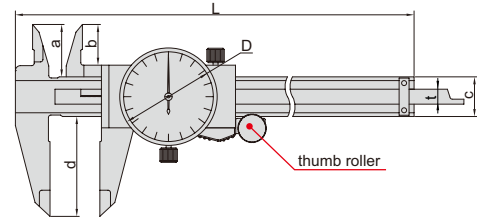

Dial indicator graduation: 0.02mm

(mm)

| Code | Range | Accuracy | Thumb roller | L | a | b | c | d | D | t |
|-------------|---------|----------|--------------|-----|----|------|----|----|-------|-----|
| 1312-150A* | 0-150mm | ±0.03mm | with | 235 | 21 | 16.5 | 16 | 40 | Ø39 | 6.5 |
| 1312-200A* | 0-200mm | ±0.03mm | with | 288 | 24 | 19 | 16 | 48 | Ø39 | 6.5 |
| 1312-300A* | 0-300mm | ±0.03mm | with | 410 | 28 | 22 | 20 | 62 | Ø44.5 | 7.5 |
| 1312-150AW* | 0-150mm | ±0.03mm | without | 235 | 21 | 16.5 | 16 | 40 | Ø39 | 6.5 |
| 1312-200AW* | 0-200mm | ±0.03mm | without | 288 | 24 | 19 | 16 | 48 | Ø39 | 6.5 |
| 1312-300AW* | 0-300mm | ±0.03mm | without | 410 | 28 | 22 | 20 | 62 | Ø44.5 | 7.5 |

Dial indicator graduation: 0.01mm

(mm)

| Code | Range | Accuracy | Thumb roller | L | a | b | c | d | D | t |
|-------------|---------|----------|--------------|-----|----|------|----|----|-------|-----|
| 1311-150A* | 0-150mm | ±0.03mm | with | 235 | 21 | 16.5 | 16 | 40 | Ø39 | 6.5 |
| 1311-200A* | 0-200mm | ±0.03mm | with | 288 | 24 | 19 | 16 | 48 | Ø39 | 6.5 |
| 1311-300A* | 0-300mm | ±0.03mm | with | 410 | 28 | 22 | 20 | 62 | Ø44.5 | 7.5 |
| 1311-150AW* | 0-150mm | ±0.03mm | without | 235 | 21 | 16.5 | 16 | 40 | Ø39 | 6.5 |
| 1311-200AW* | 0-200mm | ±0.03mm | without | 288 | 24 | 19 | 16 | 48 | Ø39 | 6.5 |
| 1311-300AW* | 0-300mm | ±0.03mm | without | 410 | 28 | 22 | 20 | 62 | Ø44.5 | 7.5 |

* Supplied with manufacturer inspection certificate traceable to DKD Germany