


WIRELESS DATA TRANSFER DIGITAL TORQUE WRENCHES



- Wireless data transfer to computer
- Unit: N.m, in.lb, ft.lb, kg.cm
- Clockwise and counter-clockwise operation
- Peak and track working mode
- Can set tolerance with judgement in peak working mode
- 9 target torque values can be set, with audible and visible alarm:
 - Green LED light on and buzzer sounds when torque value is 80%~99.5% of target torque
 - Both green and red LED light on and buzzer sounds when torque value is over 99.5% of target torque
- Power off in 2 minutes automatically
- Non-slip grip handle
- With damp record
- With overload record (once the torque reaches 110% of the maximum range)

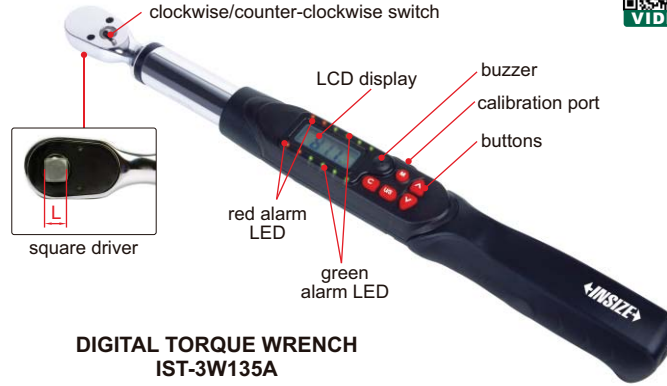


**DIGITAL TORQUE WRENCH
IST-3W135A**



**RECEIVER
IST-3WREC**



up to 10pcs torque wrench can be connected to one receiver, the maximum working distance is 300m

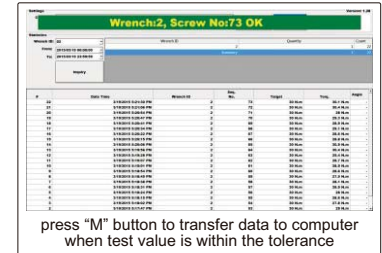

press "M" button to transfer data to computer when test value is within the tolerance

DIGITAL TORQUE WRENCH SPECIFICATION

Code	IST-3W30A	IST-3W135A	IST-3W200A	IST-3W340A	IST-3W1200A	IST-3W1500A	IST-3W2000A
Range	6~30N.m	27~135N.m	40~200N.m	68~340N.m	240~1200N.m	300~1500N.m	400~2000N.m
Accuracy	clockwise	±2%			±2.5%		
	counter-clockwise	±3%			±3.5%		
Tolerance setting range	-25% ~ +25% (target torque value)						
Resolution	0.01N.m	0.1N.m	0.1N.m	0.1N.m	1N.m	1N.m	1N.m
Square driver (L)	1/4"	3/8"	1/2"	1/2"	1"	1"	1"
Working frequency	ISM433MHz (432.0~433.8MHz, adjustable)						
Power supply	2xAA batteries, for 110 hours working						
Length	390mm	415mm	530mm	650mm	1800mm	1800mm	1800mm
Weight	760g	940g	1340g	1540g	13000g	13000g	14000g

RECEIVER SPECIFICATION

Code	IST-3WREC
Working frequency	ISM433MHz (432.0~433.8MHz adjustable)
Power supply	DC 24V, 0.5A
Dimension	200×108×31mm
Weight	500g

OPTIONAL ACCESSORY

Calibration cable	IST-SD-CABLE
-------------------	--------------