


# INTERCHANGEABLE HEAD TORQUE WRENCH SETS

ACCURACY  $\pm 3\%$

CLOCKWISE OPERATION ONLY

INSPECTION CERTIFICATE



ratchet head (included)




box end head (included, only for IST-8WM10, IST-8WM20, IST-8WM60)



open end head (included)

IST-8WM60

## torque correction

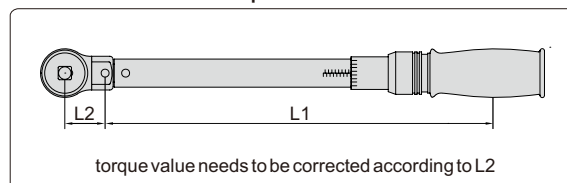

■ According to DIN ISO 6789, ASME B107.300-2010

Set torque:



step 1: unlock



step 2: set



step 3: lock

## SPECIFICATION

Code	IST-8WM10	IST-8WM20	IST-8WM60	IST-8WM100	IST-8WM200	IST-8WM340	IST-8WM400
Range (clockwise)	2 ~ 10N.m	4 ~ 20N.m	10 ~ 60N.m	20 ~ 100N.m	40 ~ 200N.m	60 ~ 340N.m	80 ~ 400N.m
Accuracy	$\pm 3\%$	$\pm 3\%$	$\pm 3\%$	$\pm 3\%$	$\pm 3\%$	$\pm 3\%$	$\pm 3\%$
Graduation	0.1N.m	0.1N.m	0.5N.m	0.5N.m	1N.m	2N.m	2N.m
Socket size (A×B)	12×9mm			18×14mm			
Arm length (L1)	218mm	261mm	261mm	366mm	420mm	521mm	521mm
Length	263mm	306mm	306mm	430mm	484mm	585mm	585mm
Weight	1264g	1372g	1372g	3712g	3825g	4047g	4047g

## STANDARD DELIVERY

Code	IST-8WM10	IST-8WM20	IST-8WM60	IST-8WM100	IST-8WM200	IST-8WM340	IST-8WM400
Torque wrench	1pc	1pc	1pc	1pc	1pc	1pc	1pc
Ratchet head	1pc (1/4")	1pc (1/4")	1pc (3/8")	1pc (3/8")	1pc (1/2")	1pc (1/2")	1pc (1/2")
Box end head	3pcs (size 10, 13, 17mm)			—			
Open end head	3pcs (size 10, 13, 17mm)			9pcs (size 13, 14, 15, 17, 19, 22, 24, 27, 30mm)			