

HIGH-DEFINITION 360° SWIVEL VIDEOSCOPIES

IP64
WATERPROOF

TUNGSTEN WIRE WEAVED CABLE
BREAK AND WEAR RESISTANCE


rapid replacement of lens cable




bend in any direction



360° swivel in clockwise and counter-clockwise



bend within α

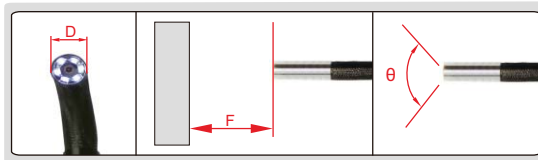

lens with LED

focus distance

angle of view



power on/off

backside LED illumination



USB port
charger port
video output
SD card

HDMI port
5" LCD

take video

zoom
manual joystick

tungsten wire
weaved cable
length: 1.5m

take picture

lens with
adjustable LED
illumination

rechargeable battery

ISV-MS726

connect to 13.3" high-definition display(supplied with HDMI cable)
(optional)



SPECIFICATION

| Code | ISV-MS726 | ISV-MS724 | |
|-----------|---------------------------------|--|-----------------|
| Lens | diameter(D) | 6.5mm | 4.5mm |
| | lens bending range (α) | $\pm 160^\circ$ | $\pm 120^\circ$ |
| | focus distance(F) | 15mm~ ∞ | 8~80mm |
| | viewing angle (θ) | $> 120^\circ$ | |
| | illumination | 6pcs LED | |
| | pixel | 0.92M | |
| | resolution | 1280x720 | |
| | dust/waterproof | IP64 | |
| | bend control | manual joystick | |
| Cable | length | 1.5m | |
| | type | tungsten wire weaved cable | |
| Main unit | function | take picture, take video | |
| | file format | picture: JPG, video: AVI | |
| | image process | brightness, image quality zoom(1X, 1.5X, 2X, 2.5X, 3X) | |
| | memory | 32G SD card | |
| | output | TV, USB, HDMI | |
| | temperature sensing | display real-time temperature of the probe | |
| | screen rotation | 180° | |
| | power supply | rechargeable battery(for 4 hours working) AC/DC adapter(for continuous working) | |
| Weight | 600g | | |

STANDARD DELIVERY

| | |
|--------------------|-----|
| Main unit | 1pc |
| Cable with lens | 1pc |
| 32G SD card | 1pc |
| AC/DC adapter | 1pc |
| Video output cable | 1pc |
| USB cable | 1pc |

OPTIONAL ACCESSORY

| | |
|--|---------------|
| 13.3" high-definition display(with HDMI cable) | DL300-DISPLAY |
|--|---------------|