


DIGITAL CENTERLINE AND EDGE TO CENTER CALIPERS



1525-300

- Non waterproof
- Measure hole center distance or edge to hole center distance
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel

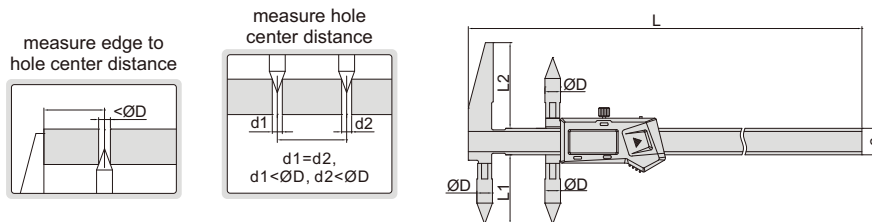

With data interface

(mm)

Code	Range of upper jaw (edge to center)	Range of lower jaw (center to center)	Accuracy	$\varnothing D$	L1	L2	c	L	Data output cable (optional)
1525-300	5-300mm/0.2-12"	10-300mm/0.4-12"	$\pm 0.08\text{mm}$	10	44.5	55	17	410	7315-21, 7302-21
1525-3001	10-300mm/0.4-12"	20-300mm/0.8-12"	$\pm 0.08\text{mm}$	20	48	60	17	410	7315-21, 7302-21
1525-500	10-500mm/0.4-20"	20-500mm/0.8-20"	$\pm 0.09\text{mm}$	20	50	60	24	690	7315-22, 7302-22
1525-1000	15-1000mm/0.6-40"	30-1000mm/1.2-40"	$\pm 0.12\text{mm}$	30	70	81	31	1255	7315-22, 7302-22
1525-1500	15-1500mm/0.6-60"	30-1500mm/1.2-60"	$\pm 0.15\text{mm}$	30	70	81	31	1760	7315-22, 7302-22

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is required)

(mm)

Code	Range of upper jaw (edge to center)	Range of lower jaw (center to center)	Accuracy	$\varnothing D$	L1	L2	c	L
1525-300WL	5-300mm/0.2-12"	10-300mm/0.4-12"	$\pm 0.08\text{mm}$	10	44.5	55	17	410
1525-3001WL	10-300mm/0.4-12"	20-300mm/0.8-12"	$\pm 0.08\text{mm}$	20	48	60	17	410
1525-500WL	10-500mm/0.4-20"	20-500mm/0.8-20"	$\pm 0.09\text{mm}$	20	50	60	24	690