

MICROPOROUS GLOSS METER (BASIC TYPE) CODE 5712-SG60

SPOT SIZE
1.5×3mm

BLUETOOTH

DATA
OUTPUT

CAN BE OPERATED BY
COMPUTERS OR MOBILE PHONES


- According to ISO 2813, ASTM D2457, ASTM D523, GB/T 9754
- For measuring the gloss level of small and curved surfaces
- To measure the gloss level of material surfaces such as paint, wood, stone, plastic, paper, leather, metal, etc.
- Automatic power off



microporous



base with calibration block
(included)

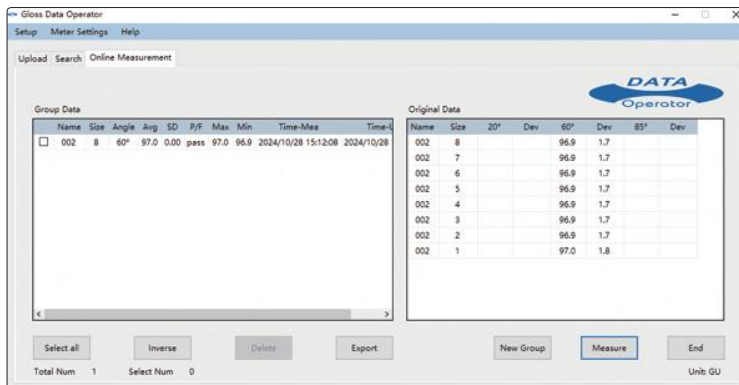

software (included), test can be controlled from the software

SPECIFICATION

Measuring angle	60°
Measuring range	0~199.9GU
Resolution	0.1GU
Accuracy	±1.5GU
Zero value error	±0.2GU
Repeatability	±0.4GU
Measuring spot	1.5mm×3mm
Minimum measurement size	2mm×4mm
Data output	Bluetooth
Software support	Windows, Android
Power supply	1×1.5AA battery
Dimension	123×65×38mm
Weight	300g

STANDARD DELIVERY

Main unit	1pc
Base with calibration block	1pc
USB flash disk	1pc
Bluetooth receiver	1pc

Bluetooth receiver (included)



connect to computer via Bluetooth



operate and output data by mobile phone
connect to mobile phone via Bluetooth
(only Android system)