


DIGITAL CALIPER WITH INTERCHANGEABLE BALL TIPS

DATA
OUTPUT



ball tips are not included

1528-3001

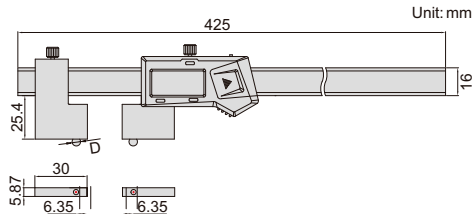

- Resolution 0.01mm/.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Made of stainless steel
- Optional accessory: ball tips, data output cable (code 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A, 7305-A01/A02)


Ball tips (optional, supplied in pair)




1527-T101



1527-T104



type A



type B

Unit: mm

| Code | Range | Accuracy |
|-----------|-----------------|----------|
| 1528-3001 | (12.7+D)~300mm* | ±0.03mm |

*"D" is the diameter of ball tips.

| Code | Diameter (D) | Accuracy of diameter | Type | Material |
|-----------|-------------------|----------------------|------|-----------------|
| 1527-T101 | 1/16" (Ø1.5875mm) | ±0.005mm | A | Ruby |
| 1527-T102 | 1/8" (Ø3.175mm) | ±0.005mm | B | Stainless steel |
| 1527-T103 | 3/16" (Ø4.7625mm) | ±0.005mm | B | Stainless steel |
| 1527-T104 | 1/4" (Ø6.35mm) | ±0.005mm | B | Stainless steel |
| 1527-T105 | 3/8" (Ø9.525mm) | ±0.005mm | B | Stainless steel |
| 1527-T106 | 1/2" (Ø12.7mm) | ±0.005mm | B | Stainless steel |