

ACCURACY $\pm 4\%$


LOUD CLICK SOUND



CLASSIC TORQUE WRENCHES



- Clockwise and counter-clockwise operation
- Unit: N.m, kgf.m, lbf.in, lbf.ft
- Loud click sound when target torque value is reached
- According to DIN ISO 6789, ASME B107.300-2010

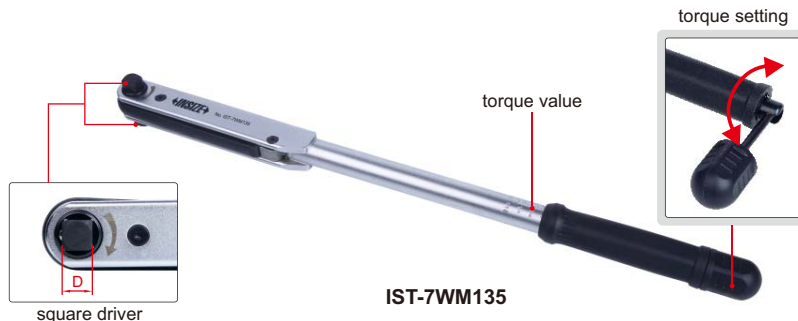

IST-7WM135

SPECIFICATION

Code		IST-7WM33	IST-7WM68	IST-7WM135	IST-7WM225	IST-7WM330	IST-7WM560	IST-7WM800	IST-7WM1000
Range	N.m	5 ~ 33	12 ~ 68	25 ~ 135	50 ~ 225	70 ~ 330	140 ~ 560	200 ~ 800	200 ~ 1000
	kgf.m	0.5 ~ 3.4	1.2 ~ 7	3 ~ 14	5 ~ 23	7 ~ 35	14 ~ 57	22 ~ 82	22 ~ 100
	lbf.in	40 ~ 300	100 ~ 600	200 ~ 1200	400 ~ 2000	60 ~ 3000	120 ~ 5000	1800 ~ 7200	1800 ~ 8850
	lbf.ft	4 ~ 24	10 ~ 50	20 ~ 100	40 ~ 160	50 ~ 250	100 ~ 410	140 ~ 600	140 ~ 740
Accuracy		$\pm 4\%$	$\pm 4\%$	$\pm 4\%$	$\pm 4\%$	$\pm 4\%$	$\pm 4\%$	$\pm 4\%$	$\pm 4\%$
Graduation	N.m	1	2	5	5	10	10	20	20
	kgf.m	0.1	0.2	1	1	1	1	2	2
	lbf.in	10	20	50	50	100	100	200	200
	lbf.ft	1	2	2	5	10	10	20	20
Square driver (D)		1/4"	3/8"	1/2"	1/2"	1/2"	3/4"	3/4"	1"
Length		425mm	500mm	556mm	600mm	805mm	996mm	1070mm	1400mm
Weight		720g	1050g	1600g	2300g	2600g	7410g	7580g	12800g