


# INTERCHANGEABLE HEAD TORQUE WRENCH SETS

ACCURACY  $\pm 4\%$

ATTENTION: CLOCKWISE  
OPERATION ONLY



**INSPECTION  
CERTIFICATE**



socket size



IST-8WM60



ratchet head (included)




box end head (included,  
only for IST-8WM10,  
IST-8WM20, IST-8WM60)



open end head (included)

torque correction

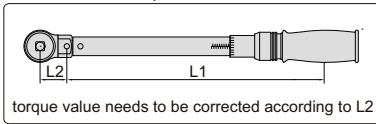

torque value needs to be corrected according to L2

torque value

torque set lock ring

- According to DIN ISO 6789, ASME B107.300

## SPECIFICATION

Code	IST-8WM10	IST-8WM20	IST-8WM60	IST-8WM100	IST-8WM200	IST-8WM340	IST-8WM400
Range (clockwise)	2~10N.m	4~20N.m	10~60N.m	20~100N.m	40~200N.m	60~340N.m	80~400N.m
Accuracy	$\pm 4\%$	$\pm 4\%$	$\pm 4\%$	$\pm 4\%$	$\pm 4\%$	$\pm 4\%$	$\pm 4\%$
Graduation	0.1N.m	0.1N.m	0.5N.m	0.5N.m	1N.m	2N.m	2N.m
Socket size (A*B)	12*9mm			18*14mm			
Arm length (L1)	218mm	261mm	261mm	366mm	420mm	521mm	521mm
Length	263mm	306mm	306mm	430mm	484mm	585mm	585mm
Weight	1264g	1372g	1372g	3712g	3825g	4047g	4047g

## STANDARD DELIVERY

Code	IST-8WM10	IST-8WM20	IST-8WM60	IST-8WM100	IST-8WM200	IST-8WM340	IST-8WM400
Torque wrench	1pc	1pc	1pc	1pc	1pc	1pc	1pc
Ratchet head	1pc (1/4")	1pc (1/4")	1pc (3/8")	1pc (3/8")	1pc (1/2")	1pc (1/2")	1pc (1/2")
Box end head	3pcs (size 10, 13, 17mm)			—			
Open end head	3pcs (size 10, 13, 17mm)			9pcs (size 13, 14, 15, 17, 19, 22, 24, 27, 30mm)			